

AERIAL JIB 1



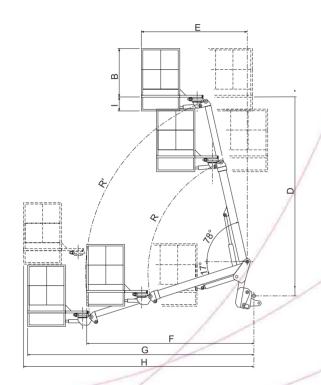

| CHARACTERISTICS | | | | | | | | | | | | | | |
|-----------------|------------|----------------|------|------|------|------|------|------|------|-----|-----|------|------|--------|
| DESCRIPTION | LOAD LIMIT | OVERALL LENGTH | | | | | | | | | | | | WEIGHT |
| | | Α | В | С | D | Е | F | G | Н | ı | L | R | R' | |
| AERIAL JIB 1 | 300 KG | 2500 | 1200 | 1000 | 5230 | 2650 | 4447 | 5910 | 6140 | 390 | 450 | 2670 | 4300 | 930 KG |

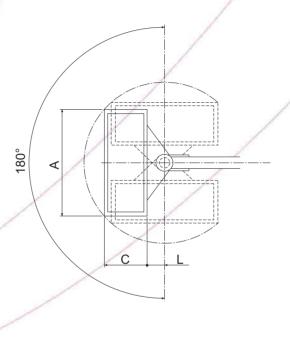

Description:

Personnel platform with 90° + 90° rotation assembled on a telescopic boom (closed: 4,5 m; open: 6 m). The boom is equipped with a cylinder, which allows it to be raised thus increasing the range of the machine by 7 m.

- Specifications:
 -Maximum load: 300 Kg
 -Maximum number of people: 2.
 -Platform dimension: 2,5 m x 1 m
 -90°+90° hydraulic rotation.
 -Door can be opened on one side of platform.

- Safety features:
 -Overload sensor.
 -Shear pin presence sensor.
 -Door closed sensor.

