

YOUR EFFECTIVE AND RELIABLE PARTNERS

# KLEOS & STACKY

MANUAL AND ELECTROMANUAL STACKERS



[www.manitou.com](http://www.manitou.com)





MANUAL LIFT SACK TRUCK / STACKER 250 - 500 - 1 000 KG

## KLEOS DHM/HM

### SPECIFICATION SHEET

Max. capacity:

Mast:

Max. lifting height:

Max. overall height:

Overall length minus tools:

Overall width :

#### DHM



250 Kg

Duplex


1 500 mm

2 043 mm

911 mm

670 mm

#### HM



250, 500, 1 000 Kg

Simplex or duplex

2 500 mm

3 190 mm

1 330 mm

710 mm

## KLEOS DHM/HM

### RELIABILITY & ADAPTABILITY




The load is lifted with a lateral handle to optimise the working area.



A decompression pedal at the base of the chassis gives the operator precise control of lowering.



Every Kleos HM has swivel wheels with protectors and immobilisation brakes.



The lifting system is composed of a cylinder, a belt or chain, a safety-check valve and an overload valve to work in total security.

## 6 INTERCHANGEABLE TOOLS

There are 6 available interchangeable tools on the Kleos range. With the grip handle putting



Adjustable forks to handle boxes, containers, etc...



Wrapover forks for standard euro pallets



Fixed platform with extendable draw to level loads or use as mobile workbench



Boom to handle reels and other rolls



Drum handle to grab and empty metal or plastic drums



Jib with hook to sling various loads with adjustable hook (except for DHM)



## KLEOS EB

### RELIABILITY & ERGONOMY




To facilitate daily material handling and to provide easy use, the Kleos EB is equipped with an electric motor.



The integral charger of the Kleos EB allows for simple recharging. The plug is plugged directly into the mains.



Every Kleos has wheel configuration with protection and brakes.



The lifting system is composed of a cylinder, a belt or chain, a safety-check valve and an overload valve to work in total security.

## 6 INTERCHANGEABLE TOOLS

There are 6 available interchangeable tools on the Kleos range. With the grip handle putting them into place it only takes 2 to 3 minutes.



Adjustable forks to handle boxes, containers, etc...



Wrapover forks for standard euro pallets



Fixed platform with extendable draw to level loads or use as mobile workbench



Boom to handle reels and other rolls



Drum handle to grab and empty metal or plastic drums



Jib with hook to sling various loads with adjustable hook (except for DHM)






ELECTRICAL STACKER 250 - 500 - 1 000 Kg

## KLEOS EB

### SPECIFICATION SHEET

Capacity: 250 / 500 / 1 000 Kg  
Mast: mono-beam simplex or duplex  
Lifting height: 1 600 à 2 500 mm  
Width: 715 mm  
Battery: 12V 110 Ah  
Lifting speed: 7,5 m/min  
Patented anti-torsion system

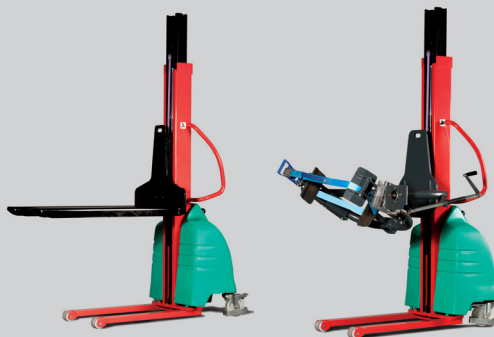



ELECTRICAL MONO MAST STACKER - 24V - 1000 Kg

## STACKY 10 FR/LE

### SPECIFICATION SHEET

Max. capacity: 1 000 Kg (CDG 600 mm)  
Mast: Mono-beam simplex or duplex  
Lifting height : 1 600/2 800 mm  
Length: 1 828 mm (wrapover forks)  
Width: 806 mm  
Aisle width: 2 234 mm  
Battery: 24V 85 Ah (without maintenance)  
LE version: side rails

FR Version



LE Version






## STACKY FR/LE

### PRODUCTIVITY & ADAPTABILITY



AC traction motor for minimum maintenance and optimal performance.



Lip container holder adjustable from 1100 to 1480mm. Ideal for handling closed pallets.




The controls offer great proportionality thanks to its electronic variator.



The integrated HF charger allows for quick and easy charging. The non-maintenance battery plugs directly into the mains.

## 6 INTERCHANGEABLE TOOLS

There are 6 available interchangeable tools on the Kleos range. With the grip handle putting them into place it only takes 2 to 3 minutes.



Adjustable forks to handle boxes, containers, etc...



Wrapover forks for standard euro pallets



Fixed platform with extendable draw to level loads or use as mobile workbench



Boom to handle reels and other rolls



Drum handle to grab and empty metal or plastic drums



Jib with hook to sling various loads with adjustable hook



## STACKY 14

### PRODUCTIVITY & SECURITY




AC translation motor for minimum maintenance and optimised performance.



The Stacky 14 is more than a lift table, it improves the ergonomics of the work area.



The controls offer great proportionality thanks to its electronic variator.



The integrated HF charger allows for quick and easy charging. The non-maintenance battery plugs directly into the mains.



The Stacky 14 meets health and safety recommendations.



A battery indicator allows the operator to control the level of the load.



ELECTRICAL MONOMAST STACKERS - 24V - 1 400 Kg

## STACKY 14

### SPECIFICATION SHEET

Max capacity: 1 400 Kg  
Mast: mono-beam simplex  
Max lifting height: 900 mm  
Max overall height: 1 331 mm  
Length: 1 820 mm (with forks)  
Overall width: 806 mm  
Aisle width: 2 070 mm  
Semi-traction 24V/85Ah battery



# WAREHOUSING RANGE BY MANITOU

## Industrial tractors

CT Series ac : 3000 - 4000 - 5000 kg



## Order pickers

CI Series ac : 1000 - 1200 - 2000 kg




## Articulated electrical forklifts

MANIARTIC : 1500 - 2000 kg



## Pallet trucks

① EP22M PFR ac. : 2200 kg ② EP ac Series : 1600  
1800 - 2000 kg ③ EH Series : 2500 kg

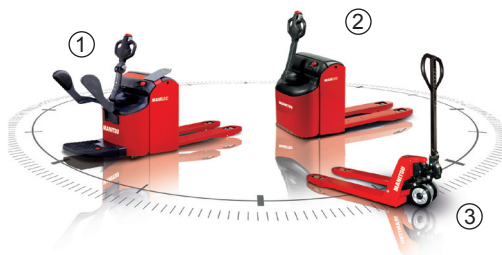

## Electrical & semi-electrical stackers

① Kléos Series : 250 - 500 - 1000 kg ② Stacky Series ac : 1000 - 1400 kg ③ ES 6 ac Series : 1400 - 1600 kg  
④ ES 820 ac : 2000 kg ⑤ ES 4 ac Series : 1000 et 1200 kg ⑥ ES 420 M DL ac : 2000 ou 2x1000 kg





## **RELATED SERVICES BY MANITOU**

**A COMPLETE RANGE OF MAINTENANCE  
AND FINANCING SOLUTIONS  
TO SIMPLIFY YOUR DAILY WORK!**



### **Optimal maintenance**

For greater peace of mind, let the specialists take care of maintaining and monitoring your handling equipment!

---

### **Simple financing solutions that are suited to your needs**

Do you need a simple way of keeping your budget under control? Choose one of the financing solutions proposed by the Manitou network.

---

### **Extended warranty**

We can also offer you an extended warranty for your equipment.

Your nearest **MANITOU** dealer:



Head office:

B.P. 249 - 430 rue de l'Aubinière - 44158 Ancenis Cedex - France

Tél: 00 33 (0)2 40 09 10 11 - Fax: 00 33 (0)2 40 83 36 88

[www.manitou.com](http://www.manitou.com)



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,547,824 euros - 857 802 508 RCS Nantes